



DESIGNED BY

24 POSSIBLE VARIATIONS

Stephen Katz

STEPHEN KATZ, AIA

Nan XL

“Geometry In Motion” - Stephen Katz

With its graceful presence and impeccable balance, Nan XL effortlessly enhances any room, offering a refreshing breeze with fully adjustable motor speeds to suit every season. Whether gracing a grand living space or elevating a stylish commercial setting, it feels like a natural extension of its surroundings—quietly powerful, effortlessly elegant. For more compact spaces, the standard Nan fan is available in 42”, 52”, and 60” diameters, ensuring the perfect fit for any design vision. Experience the harmony of innovation and beauty with Nan XL—a ceiling fan that transcends function to become a statement of refined sophistication.



Shown:

NKXL-BRBR-WA-72 Brushed Brass Finish, with 72" Walnut Tone Blades
See a similar look in a Ceiling Mount, The Irene 3H on pg. 50




Shown:
NKXL-BK-LM-72 Matte Black Finish, with 72" Light Maple Tone Blades



NKXL-TB-BK-72
Textured Bronze Finish,
with 72" Matte Black Blades

NKXL-BK-BK-72
Matte Black Finish,
with 72" Matte Black Blades

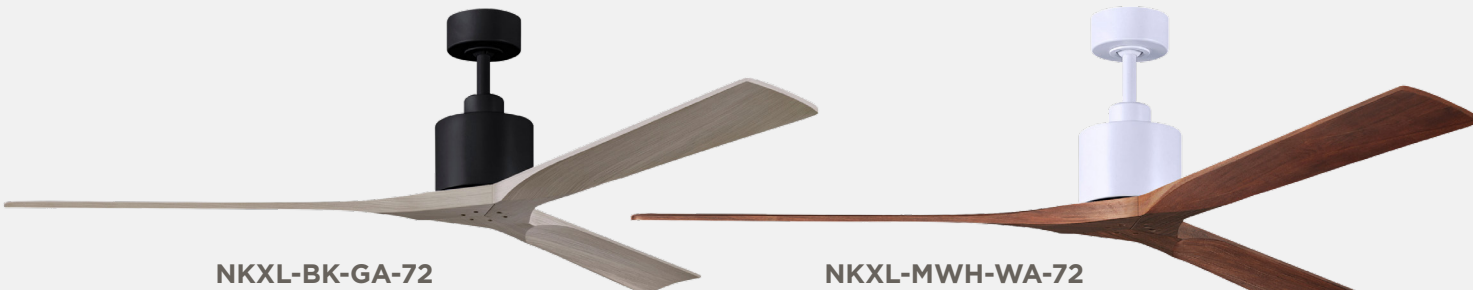

NKXL-BK-GA-72
Matte Black Finish,
with 72" Gray Ash Tone Blades

NKXL-MWH-WA-72
Matte White Finish,
with 72" Walnut Tone Blades



NKXL-TB-LM-72
Textured Bronze Finish,
with 72" Light Maple Tone Blades

NKXL-BRBR-MWH-72
Brushed Brass Finish,
with 72" Matte White Blades

PRODUCT FEATURES

- DC Motor
- Silent Motor
- Handheld Remote
- 30° Slant Ceiling Canopy
- Wall Control
- Damp Location
- Unipack Shipping
- Optional 60° Slant Mount

FAN FEATURES

- Blades (3)**
 - 15° Blade Pitch
 - CNC Cut Solid Wood
- Overall Drop** 12 inches / 30 cm +downrod length
- Fan Weight** 19 lbs
- Fan Diameter** inches: 72
centimeters: 183
- Downrod Lengths**
inches: 5, 10, 18, 24, 36, 48, 60, 72
centimeters: 13, 25, 46, 61, 92, 122, 153, 183
Field cuttable, Non-threaded
- Downrod Diameter** 1 inch
- Voltage** 110 or 220

MOTOR FEATURES

- Motor Type** DC
- Ambience** Silent
- Safety Certification** ETL / CETL
- Warranty** Limited Lifetime

DOE MOTOR EFFICIENCY DATA

- RPM (Low/High)** 50 / 102
- CFM (Low/High)** 3892 / 8681
- Watts (High)** 32
- CFM/Watt (High)** 302

STANDARD EQUIPMENT

- Downrod** 10in / 25cm
- Slant Ceiling Canopy** 30°




- Handheld Remote**
- 6 Speed
 - Motor Off
 - Reverse



- Wireless Wall Control**
- 6 Speed
 - Motor Off
 - Reverse

**For more information see accessory page. 132*

TECHNICAL SPECIFICATIONS

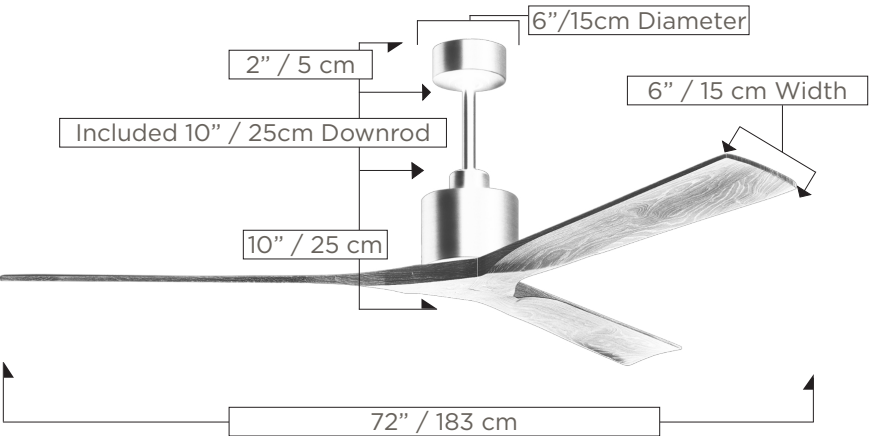

SKU BUILDER

NKXL-XXXX-XXX-XX
(Model+Finish+Blade+Diameter)

FAN FINISHES

24 POSSIBLE VARIATIONS

Fan Finishes	Blade Finishes
No Light Kit	72"



BRBR
Brushed Brass



BW
Barn Wood Tone



BK
Matte Black



GA
Gray Ash Tone



MWH
Matte White



LM
Light Maple Tone



TB
Textured Bronze



BK
Matte Black



MWH
Matte White



WA
Walnut Tone